


# PMU8000 Analog Point of Load

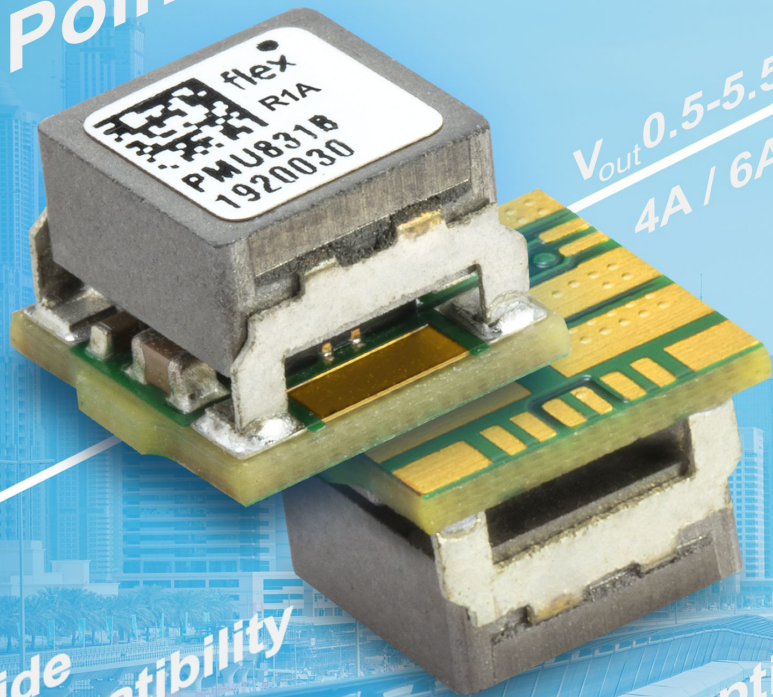

$V_{out}$  0.5-5.5 V  
4A / 6A / 8A


Available as  
22W / 33W / 44W

$V_{in}$  4.5-17 V

Bottom side  
mounting compatibility

Loop optimization  
Soft start &  
tracking/sequencing features

Low weight: 0.92 g

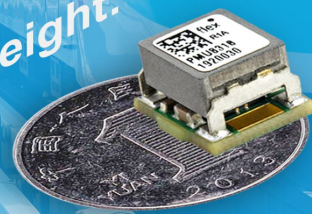

Ultra small form factor  
7.5 x 7.5 x 5.4 mm

